


TABLE LIFT - HTL series



ⓘ IMPORTANT CHECK POINT TO FIX THE PRODUCTION SPECIFICATIONS OF TABLE LIFT

1. TABLE SIZE: *DIMENSION OF UPPER PLATE FOR WORK-AxBmm*
2. WORK LOAD: *MAXIMUM WORK LOAD-kg*
3. VERTICAL STROKE OF TABLE LIFT: *STROKE-S.Tmm*
4. MINIMUM HEIGHT WHEN TABLE LIFT DOWN: *Mmm*
5. MAXIMUM HEIGHT WHEN TABLE LIFT UP: *Hmm*
6. AVAILABILITY OF HANDRAIL & GUIDE RAIL AT THE UPPER PART OF TABLE
7. CONNECTION WITH INTERIOR/EXTERIOR OF HYDRAULIC UNIT
8. CARRYING GOODS' TYPE, SIZE & WEIGHT, ETC

IF YOU HAVE ANY SPECIAL REQUIREMENTS, PLEASE CONSULT IT WITH OUR HANSUNG TECH TEAM AND MAKE DECISION FOR SPECIFICATIONS. CORRECT SOLUTION TO BE PROVIDED!

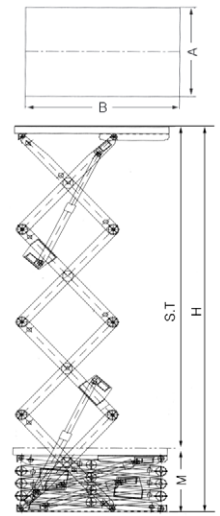

ⓘ 3 STAGE TYPE SPECIFICATIONS (X-LINK 1 STAGE)


MODEL	TABLE SIZE	WORKING LOAD	MINIMUM HEIGHT	MAXIMUM HEIGHT	CLIMBING SPEED
HTL-10E-0918-38	900×1800 mm	1000 kg	800 mm	3800 mm	36 sec
HTL-20E-0918-38	900×1800 mm	2000 kg	800 mm	3800 mm	36 sec
HTL-20E-1220-44	1200×2000 mm	2000 kg	800 mm	4400 mm	50 sec
HTL-20E-1224-50	1200×2400 mm	2000 kg	900 mm	5000 mm	55 sec
HTL-30E-1224-49	1200×2400 mm	3000 kg	1000 mm	4900 mm	60 sec
HTL-50E-1224-48	1200×2400 mm	5000 kg	1200 mm	4800 mm	65 sec

ⓘ 4 STAGE TYPE SPECIFICATIONS (X-LINK 1 STAGE)


MODEL	TABLE SIZE	WORKING LOAD	MINIMUM HEIGHT	MAXIMUM HEIGHT	CLIMBING SPEED
HTL-10E-1224-66	1200×2400 mm	1000 kg	1100 mm	6600 mm	65 sec
HTL-10E-2024-66	2000×2400 mm	1000 kg	1100 mm	6600 mm	65 sec
HTL-20E-1224-65	1200×2400 mm	2000 kg	1200 mm	6500 mm	68 sec
HTL-20E-2024-65	2000×2400 mm	2000 kg	1200 mm	6500 mm	68 sec
HTL-20E-2030-80	2000×3000 mm	2000 kg	1400 mm	8000 mm	80 sec



▲ INSTALLATION OF ATTACHED TYPE OF TURNTABLE AT HYUNDAI MOTOR

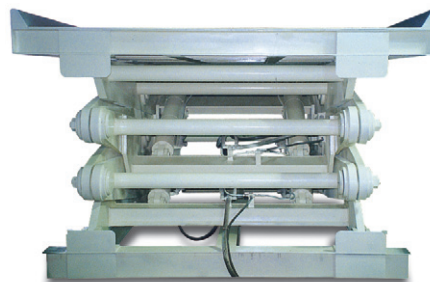

◀ 15 TON & 3 STAGE LINK INSTALLED AT SUNGWOO HITECH

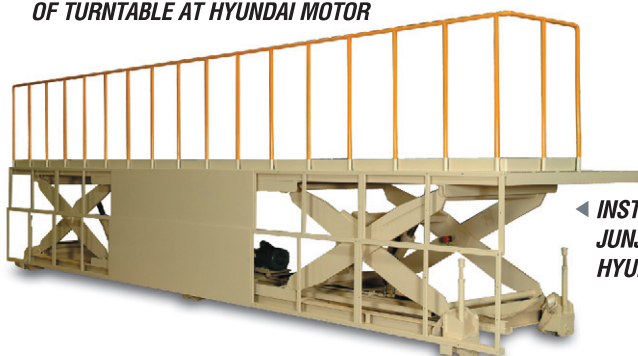

◀ INSTALLATION AT JUNJOO FACTORY OF HYUNDAI MOTOR COMPANY

